

ZOOMLION TELESCOPIC BOOM LIFTS

Comply with CE/ANSI/GB Standard

FEATURES

Standard Features

Horn
All motion alarm
Proportional control
Self-closing entry gate
Flashing amber beacon
GPS positioning and tracking system
Remote monitoring and rental management system
Auto-leveling system
Emergency stop button
Over tilt protection system
Emergency descent system
On-board diagnostic system
Oscillating axle
4.3' LED display
Load sensing system
Swing-out engine tray

Accessories & Options

Platform work lights
Anti-collision device
AC power to platform



HIGHLIGHTS

- Better work envelop performance, 10% larger than competitor.
- Zoomlion AWM Remote Monitoring and Rental Management System.
- Industry leading telematic control interface with self-diagnostic monitoring capability.
- Platform dual capacity design, up to 300/454kg.
- Smooth & stable boom extension control as low as 15mm/s.

ACCESS WITH ZOOMLION GREEN



Hotline: +86 400-800-0157
E-mail: awm@zoomlion.com

Add: ZOOMLION Wangcheng Industrial Park, Tengfei Road 997, Changsha, Hunan, China.
Learn more at <http://en.zoomlion.com/>

MAIN SPECS OF TELESCOPIC BOOM LIFTS

Comply with CE/ANSI/GB Standard

Model		ZT20J
Size		
Work Height		22.75 m
Platform Height		20.75 m
Horizontal Outreach		16.80 m
A - Stowed Length		10.36 m
B - Stowed Width		2.49 m
C - Stowed Height		2.78 m
D - Platform Length		2.44 m
E - Platform Width		0.91 m
F - Wheelbase		2.52 m
Wheelbase		2.13 m
G - Ground Clearance		0.42 m
Performance		
Platform Capacity (Unrestricted/Restricted)		300 kg / 454 kg
Drive Speed (Working)		6.0 km/h
Gradeability		45% (24°)
Turning Radius (Inside)		2.4 m
Turning Radius (Outside)		5.4 m
Turntable Swing		360° continuous
Platform Rotation		±90°
Tail Swing		1.45 m
Jib (Range of Articulation)		135° (- 60° ~ 75°)
Max. Working Slope		3°
Max. Wind Speed		12.5 m/s
Power		
Engine		Deutz D447 L4/ Perkins 404D-22T
Fuel Tank Capacity		130 L
Control Voltage		12 V DC
Hydraulic Tank Capacity		150 L
Drive Mode		4WD
Steering Mode		Front-wheel
Tire		
Type		355/55D-625 Foam-filled Tires
Weight		
Gross		12200 kg

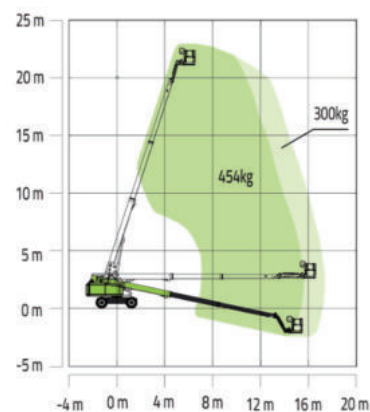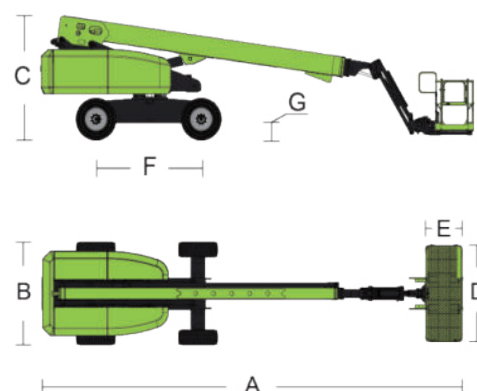

ZT20J Working Envelope