# ZOONLION ARTICULATING BOOM LIFT ZA14J

Comply with CE/ANSI/CSA Standard

## **HIGHLIGHTS**



### **Standard Features**

V	Horn
	All motion alarm
\	Proportional control
	Self-closing entry gate
	Flashing beacon
	Auto-leveling system
	Emergency stop button
\	Over tilt protection system
	Emergency descent system
	On-board diagnostic system
	Oscillating axle
\	4.3' LED display
	Load sensing system
	Swing-out engine tray
. '	

### **Accessories & Options**

- ▶ Platform work lights
- ► Anti-collision device
- ▶ AC power to platform




# **ACCESS WITH ZOOMLION GREEN**


Phone: 0086(731)-88353692 E-mail: awp@zoomlion.com Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China Web: www.zoomlion-access.com

### **ZOOMLION**

Model	Z/	ZA14J		
	Imperial	Metric		
	Size			
Work Height	51ft 10in	15.80m		
Platform Height	45ft 3in	13.80m		
Horizontal Outreach	27ft 3in	8.30m		
Up and Over Height	24ft 9in	7.55m		
A - Stowed Length	21ft 7in	6.57m		
B - Stowed Width	7ft 7in	2.30m		
C - Stowed Height	7ft 5in	2.27m		
D - Platform Length	6ft	1.83m		
E - Platform Width	2ft 6in	0.76m		
Jib Length	4ft 1in	1.24m		
F - Wheelbase	7ft 9in	2.36m		
G - Ground Clearance	1ft 5in	0.42m		
Performance				
Platform Capacity	660 lb	300kg		
Drive Speed	4.23 mph	6.8km/h		
Gradeability	45%(24°)	45%(24°)		
Axles Oscillation	4in	0.1m		
Turning Radius (Inside)	6ft 9in	2.06m		
Turning Radius (Outside)	15ft 8in	4.78m		
Swing 355° non-cont		continuous		
Platform Rotation	±90°			
H-Tail Swing		0		
Max. Wind Speed	28mph	12.5m/s		
	Power			
Diesel Engine		Kubota V2403 36kw/2600rpm Kubota V2403 36.8kw/2700rpm(EU V)		
Fuel Tank Capacity	17.2 (us gal)	65L		
Auxiliary Power	1	2V		
Control Voltage	12V			
Hydraulic System Capacity	39.6 (us gal)	150L		
Hydraulic Tank Capacity	20.1 (us gal)	76L		
Drive	4WD			
	Tire			
Туре	315/55 D20 Foam-filled Tires 33×12-20 Solid Tires			
	Weight			
Gross	15653 lb	7100kg		





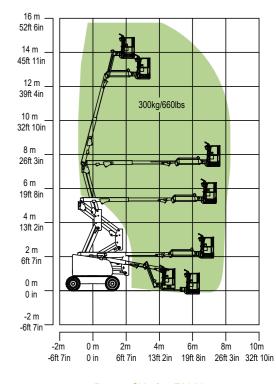

Range of Motion ZA14J